

# Game Theory

## 10. Poker

Albert-Ludwigs-Universität Freiburg



Bernhard Nebel and Robert Mattmüller

# 1 Motivation



Motivation  
Kuhn Poker  
Real Poker: Problems and techniques  
Counterfactual regret minimization

# Motivation



- The system **Libratus** played a Poker tournament (*heads up no-limit Texas hold 'em*) from January 11 to 31, 2017 against four world-class Poker players.
  - Heads up: One-on-One, i.e., a zero-sum game.
  - No-limit: There is no limit in betting, only the stack the user has.
  - Texas hold'em: Each player gets two private cards, then open cards are dealt: first three, then one, and finally another one.
  - One combines the best 5 cards.
  - Betting before the open cards are dealt and in the end: check, call, raise, or fold.
- Two teams (reversing the dealt cards).
- Libratus won the tournament with more than 1.7 Million US-\$ (which neither the system nor the programming team got).

Motivation  
Kuhn Poker  
Real Poker: Problems and techniques  
Counterfactual regret minimization

# The humans behind the scene



Professional player Jason Les and Prof. Tuomas Sandholm (CMU)

Motivation  
Kuhn Poker  
Real Poker: Problems and techniques  
Counterfactual regret minimization

## 2 Kuhn Poker

Motivation  
 Kuhn Poker  
 Real Poker: Problems and techniques  
 Counterfactual regret minimization


## Kuhn Poker

Motivation  
 Kuhn Poker  
 Real Poker: Problems and techniques  
 Counterfactual regret minimization

- Minimal form of heads-up Poker, with only three cards: Jack, Queen, King.
- Each player is dealt one card and antes 1 chip (forced bet in the beginning).
- Player 1 can check (declines to make a bet), or bet 1 chip.
- After player 1 has checked, player 2 can check or bet. If player 2 bets, player 1 can fold or call (also betting one chip)
- After Player 1 has bet, player 2 can fold or call.

## Kuhn Poker: Game tree

- chance node
- player one node
- ▲ player two node
- ◆ terminal node
- player one information set
- player two information set

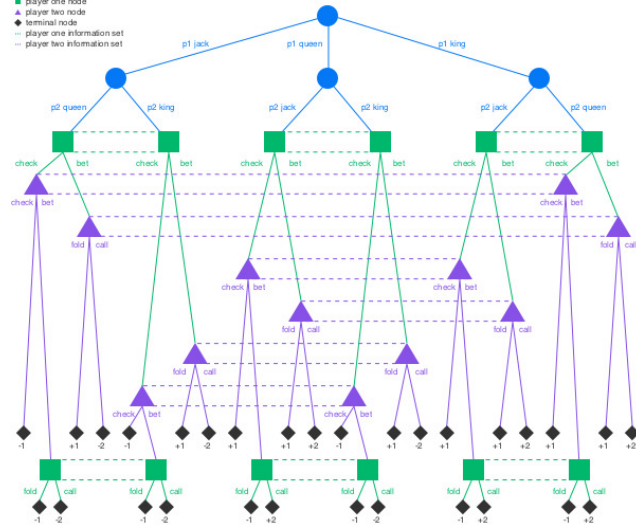

## Kuhn Poker: Results

Motivation  
 Kuhn Poker  
 Real Poker: Problems and techniques  
 Counterfactual regret minimization

Kuhn has shown:

- There exist a family of Nash equilibria behavioral strategies for player 1 and one behavioral NE strategy for player 2.
- In this Nash equilibrium, the expected payoff for player 1 is  $-1/18$ .
- That shows the systematic disadvantage, the first player has!

## 3 Real Poker: Problems and techniques



Motivation  
Kuhn Poker  
Real Poker:  
Problems  
and  
techniques  
Counterfac-  
tual regret  
minimization

## State space size



Motivation  
Kuhn Poker  
Real Poker:  
Problems  
and  
techniques  
Counterfac-  
tual regret  
minimization

- **Reminder:** In chess, there are  $10^{47}$  distinct states, in Backgammon there are  $10^{20}$ .
- Heads-up limit Texas hold'em has  $10^{17}$  distinct states and  $10^{14}$  information sets.
- No-limit: Depends on stack. With 20k\$:  $10^{161}$  information sets.

## General techniques



Motivation  
Kuhn Poker  
Real Poker:  
Problems  
and  
techniques  
Counterfac-  
tual regret  
minimization

- **Abstraction:** Action abstraction (bet size) and card abstractions (classifying similar hands into buckets) → only  $10^{12}$  information sets.
- **Equilibrium computation:** Using **counterfactual regret minimization** as a self-play technique.
- **Sub-game solving:** In later betting rounds, one solves the game with a finer abstraction (and the information gained from the game so far).
- **Self-Improvement:** During the night, new parts of the game tree are explored, when abstraction is too coarse there.
- 25 Million core hours to compute strategies.

## 4 Counterfactual regret minimization



Motivation  
Kuhn Poker  
Real Poker:  
Problems  
and  
techniques  
Counterfac-  
tual regret  
minimization

## Regret matching in strategic games



Play a strategic game for a number of rounds:

- **Regret** is determined after each game round: If I had played another move, my payoff would have been *that* much higher!
- **Accumulate** all positive regrets over time.
- **Match** the probabilities of a mixed strategy with the accumulated regret.

Take the **average** over all mixed strategies.

If two players use the **regret matching technique** in a zero-sum game, then the average over the mixed strategies converges to Nash equilibrium strategies.

Motivation  
Kuhn Poker  
Real Poker:  
Problems  
and  
techniques  
Counterfac-  
tual regret  
minimization

## Regret matching: RPS example with two rounds I



Assume we play rock, paper, scissors, and player 1 uses regret matching.

- 1 Initial **cumulative regret** is  $(0, 0, 0)$ .
- 2 If there is no positive accumulated regret, play uniform strategy  $(1/3, 1/3, 1/3)$ .
- 3 Player 1 chooses  $R$ , player 2  $P$ .
- 4 **Regret** for player 1:
  - $R: u_1(R, P) - u_1(R, P) = -1 - -1 = 0$
  - $P: u_1(P, P) - u_1(R, P) = 0 - -1 = +1$
  - $S: u_1(S, P) - u_1(R, P) = 1 - -1 = +2$
- 5 Player 1's **cumulative regret** is now  $(0, 1, 2)$
- 6 **Regret matching** suggests this strategy:  $\alpha_1^1 = (0, 1/3, 2/3)$ .
- 7 Player 1 chooses  $P$ , while player 2 chooses  $S$

Motivation  
Kuhn Poker  
Real Poker:  
Problems  
and  
techniques  
Counterfac-  
tual regret  
minimization

## Regret matching: RPS example with two rounds II



8 **Regret** for player 1:

- $R: u_1(R, S) - u_1(P, S) = 1 - -1 = +2$
- $P: u_1(P, S) - u_1(P, S) = -1 - -1 = 0$
- $S: u_1(S, S) - u_1(P, S) = 0 - -1 = +1$

9 **Cumulative regret** is now  $(2, 1, 3)$

10 **Regret matching**:  $\alpha_1^2 = (1/3, 1/6, 1/2)$

11 The **average strategy** is  $(1/6, 3/12, 7/12)$ . Well, not close to the NE strategy, but will converge!

Motivation  
Kuhn Poker  
Real Poker:  
Problems  
and  
techniques  
Counterfac-  
tual regret  
minimization

## Counterfactual regret minimization



- Regret matching in **strategic games** does not buy us anything. We know how to compute NEs for zero-sum games already.
- In **extensive-form games**, we can use it to modify our behavioral strategies at each information set.
- We have to “pass down” the probability that an information set is reached and have to “pass up” the utility of a terminal history.
- As in the strategic game case, the average strategy **converges** to a **Nash equilibrium (in behavioral strategies)**.
- Is it good enough?
- Since a lot of histories are explored, also “**off-NE strategies**” will be visited and reasonable choice will occur.

Motivation  
Kuhn Poker  
Real Poker:  
Problems  
and  
techniques  
Counterfac-  
tual regret  
minimization

## Notation & Definitions I



- During training,  $t$  and  $T$  denote time steps.
- Let  $\pi^\beta(h)$  be the probability that **history  $h$  will be reached** (depends on behavioral strategy profile  $\beta$  and chance moves).
- $\pi^\beta(I_i) = \sum_{h \in I_i} \pi^\beta(h)$  is then the probability that **information set  $I_i$  will be reached**.
- The **counterfactual reach probability** of  $I_i$ , written  $\pi_{-i}^\beta(I_i)$ , is the probability of reaching  $I_i$  under the assumption that player  $i$  always uses actions with probability 1 in order to reach  $I_i$ .
- If  $\beta$  is a behavioral strategy profile, then  $\beta_{I_i \rightarrow a}$  is the same profile, except that at information set  $I_i$ , player  $i$  always plays  $a$ .

Motivation  
Kuhn Poker  
Real Poker:  
Problems  
and  
techniques  
Counterfactual  
regret  
minimization

## Notation & Definitions II



- If  $z \in Z$  is a terminal history, then we write  $h \sqsubset z$ , if  $h$  is a proper prefix of  $z$ .
- For  $h \sqsubset z$ , the notation  $\pi^\beta(h, z)$  is the probability that we reach  $z$  from  $h$ .
- The **counterfactual utility** of  $\beta$  at non-terminal history  $h$  is:

$$v_i(\beta, h) = \sum_{z \in Z, h \sqsubset z} \pi_{-i}^\beta(h) \pi^\beta(h, z) u_i(z).$$

- The **counterfactual regret** of not taking action  $a$  at history  $h \in I_i$  is:

$$r(h, a) = v_i(\beta_{I_i \rightarrow a}, h) - v_i(\beta, h).$$

Motivation  
Kuhn Poker  
Real Poker:  
Problems  
and  
techniques  
Counterfactual  
regret  
minimization

## Notation & Definitions III



- **Counterfactual regret** of not taking  $a$  at  $I_i$ :

$$r(I_i, a) = \sum_{h \in I_i} r(h, a).$$

- $r_i^t(I_i, a)$  refers to the regret in episode  $t$ , when players use  $\beta^t$  and  $i$  does not  $a$  in  $I_i$ .
- **Cumulative counterfactual regret** is then defined as:

$$R_i^T(I_i, a) = \sum_{t=1}^T r_i^t(I_i, a).$$

- Let us define the **positive cumulative counterfactual regret** as:  $R_i^{T,+}(I_i, a) = \max(R_i^T(I_i, a), 0)$ .

Motivation  
Kuhn Poker  
Real Poker:  
Problems  
and  
techniques  
Counterfactual  
regret  
minimization

## Notation & Definitions IV



- Now, the **regret matching strategy** for episode  $T + 1$  is called  $\beta^{T+1}$  and computed as:

$$\beta^{T+1}(I_i, a) = \begin{cases} \frac{R_i^{T,+}(I_i, a)}{\sum_{a \in A(I_i)} R_i^{T,+}(I_i, a)} & \text{if } \sum_{a \in A(I_i)} R_i^{T,+}(I_i, a) > 0 \\ \frac{1}{|A(I_i)|} & \text{otherwise.} \end{cases}$$

Motivation  
Kuhn Poker  
Real Poker:  
Problems  
and  
techniques  
Counterfactual  
regret  
minimization

- One use usually what is called **chance sampling**, i.e., one uses one or more **shuffles** of the cards to compute the values for one episode.
- That also means that only a small part of the game tree needs to be in **main memory**.
- After a fixed number of episodes one stop and then has an (approximate) NE.
- Although, we would have liked a **sequential equilibrium**, we most probably will also collect regret values for information set, which are not on equilibrium profile histories.
- There are many variations and refinements of CFR.
- Looks like **reinforcement learning**, but it is not.

Motivation

Kuhn Poker

Real Poker:  
Problems  
and  
techniques

Counterfac-  
tual regret  
minimization