

Foundations of AI

10. Knowledge Representation: Modeling with Logic

Concepts, Actions, Time, & All the Rest

*Wolfram Burgard, Andreas Karwath,
Bernhard Nebel, and Martin Riedmiller*

10/1

Contents

- Knowledge representation and reasoning
- Concepts & description logics
- Logical agents for the WUMPUS world
- Situation calculus
- The frame problem
- Time intervals and their description

10/2

Knowledge Representation and Reasoning

- Often, our agents need **knowledge** before they can start to act intelligently
- They then also need some **reasoning component** to exploit the knowledge they have
- Examples:
 - Knowledge about the important **concepts** in a domain
 - Knowledge about **actions** one can perform in a domain
 - Knowledge about **temporal relationships** between events
 - Knowledge about the world and how properties are related to actions


10/3

Categories and Objects

- We need to describe the objects in our world using **categories**
- Necessary to establish a common category system for different applications (in particular on the web)
- There are a number of quite general categories everybody and every application uses

10/4

The Upper Ontology: A General Category Hierarchy

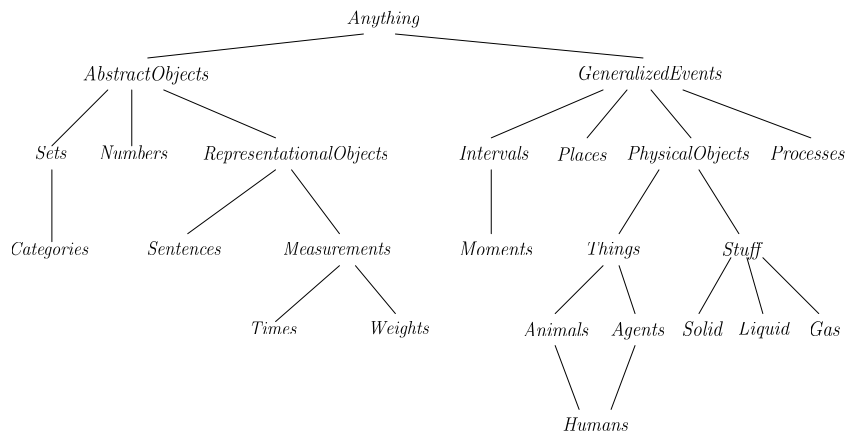

10/5

Description Logics

- How to describe more specialized things?
- Use definitions and/or necessary conditions referring to other already defined *concepts*:
 - a **parent** is a **human** with at least one **child**
- More complex description:
 - a **proud-grandmother** is a **human**, which is **female** with at least two **children** that are in turn **parents** whose **children** are all **doctors**

10/6

Reasoning Services in Description Logics

- **Subsumption**: Determine whether one description is more general than (subsumes) the other
- **Classification**: Create a subsumption hierarchy
- **Satisfiability**: Is a description satisfiable?
- **Instance relationship**: Is a given object instance of a concept description?
- **Instance retrieval**: Retrieve all objects for a given concept description

10/7

Special Properties of Description Logics

- Semantics of description logics (DLs) can be given using ordinary PL1
- Alternatively, DLs can be considered as modal logics
- Reasoning for most DLs is much more efficient than for PL1
- Nowadays, W3C standards such as OWL (formerly DAML+OIL) are based on description logics

10/8

Logic-Based Agents That Act

```

function KB-AGENT(percept) returns an action
static: KB, a knowledge base
        t, a counter, initially 0, indicating time
TELL(KB, MAKE-PERCEPT-SENTENCE(percept, t))
action ← ASK(KB, MAKE-ACTION-QUERY(t))
TELL(KB, MAKE-ACTION-SENTENCE(action, t))
t ← t + 1
return action
    
```

Query (Make-Action-Query): $\exists x \text{Action}(x, t)$

A variable assignment for x in the WUMPUS world example should give the following answers:
turn(right), *turn(left)*, *forward*, *shoot*, *grab*, *release*, *climb*

10/9

Reflex Agents

... only react to percepts.

Example of a percept statement (at time 5):

Percept(stench, breeze, glitter, none, none, 5)

- $\forall b, g, u, c, t [\text{Percept}(stench, b, g, u, c, t) \Rightarrow \text{Stench}(t)]$
 $\forall s, g, u, c, t [\text{Percept}(s, breeze, g, u, c, t) \Rightarrow \text{Breeze}(t)]$
 $\forall s, b, g, u, c, t [\text{Percept}(s, b, glitter, u, c, t) \Rightarrow \text{AtGold}(t)]$
 ...
- Step: Choice of action

$\forall t [\text{AtGold}(t) \Rightarrow \text{Action}(grab, t)]$

...

Note: Our reflex agent does not know when it should climb out of the cave and cannot avoid an infinite loop. 10/10

Model-Based Agents

... have an internal model

- of all basic aspects of their environment,
- of the executability and effects of their actions,
- of further basic laws of the world, and
- of their own goals.

Important aspect: How does the world change?

→ **Situation calculus:** (McCarthy, 63).

10/11

Situation Calculus

- A way to describe **dynamic worlds** with PL1.
- States** are represented by terms.
- The world is in state s and can only be altered through the execution of an **action**: $do(a, s)$ is the **resulting situation**, if a is executed.
- Actions have **preconditions** and are described by their **effects**.
- Relations whose truth value changes over time are called **fluents**. Represented through a predicate with two arguments: the fluent and a state term. For example, $At(x, s)$ means, that in situation s , the agent is at position x . $Holding(y, s)$ means that in situation s , the agent holds object y .
- Atemporal** or **eternal** predicates, e.g., $Portable(gold)$.

10/12


Example: WUMPUS-World

Let s_0 be the initial situation and

$$s_1 = do(forward, s_0)$$

$$s_2 = do(turn(right), s_1)$$

$$s_3 = do(forward, s_2)$$

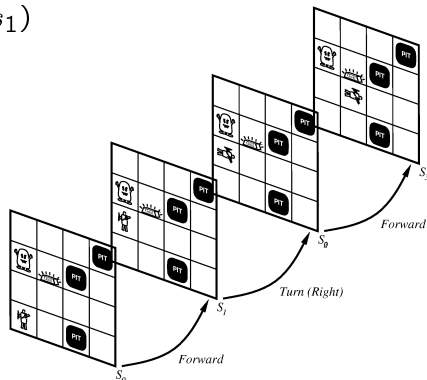

10/13

Description of Actions

Preconditions: In order to pick something up, it must be both present and portable:

$$\forall x, s [Poss(grab(x), s) \Leftrightarrow Present(x, s) \wedge Portable(x)]$$

In the WUMPUS-World:

$$Portable(gold), \forall s [AtGold(s) \Rightarrow Present(gold, s)]$$

Positive effect axiom:

$$\forall x, s [Poss(grab(x), s) \Rightarrow Holding(x, do(grab(x), s)))]$$

Negative effect axiom:

$$\forall x, s \neg Holding(x, do(release(x), s))$$

10/14

The Frame Problem

We had: $Holding(gold, s_0)$.

Following situation: $\neg Holding(gold, do(release(gold), s_0))$?

We had: $\neg Holding(gold, s_0)$.

Following situation: $\neg Holding(gold, do(turn(right), s_0))$?

- We must also specify which *fluents* remain unchanged!
- The frame problem: Specification of the properties that *do not* change as a result of an action.

→ Frame axioms must also be specified.

10/15

Number of Frame Axioms

$$\forall a, x, s [Holding(x, s) \wedge (a \neq release(x)) \Rightarrow Holding(x, do(a, s))]$$

$$\forall a, x, s [\neg Holding(x, s) \wedge \{(a \neq grab(x)) \vee \neg Poss(grab(x), s)\} \Rightarrow \neg Holding(x, do(a, s))]$$

Can be very expensive in some situations, since $O(|F| \times |A|)$ axioms must be specified, F being the set of fluents and A being the set of actions.

10/16

Successor-State Axioms

A more elegant way to solve the frame problem is to fully describe the successor situation:

$true$ after action \Leftrightarrow [action made it $true$ already true and the action did not falsify it]

Example for *grab* :

$$\forall a, x, s [Holding(x, do(a, s)) \\ \Leftrightarrow \{ (a = grab(x) \wedge Poss(a, s)) \vee (Holding(x, s) \wedge a \neq release(x)) \}]$$

Can also be automatically compiled by only giving the effect axioms (and then applying *explanation closure*). Here we suppose that only certain effects can appear.

10/17

Limits of this Version of Situation Calculus

- No explicit time. We cannot discuss how long an action will require, if it is executed.
 - Only one agent. In principle, however, several agents can be modeled.
 - No parallel execution of actions.
 - Discrete situations. No continuous actions, such as moving an object from A to B.
 - Closed world. Only the agent changes the situation.
 - Determinism. Actions are always executed with absolute certainty.
- Nonetheless, sufficient for many situations.

10/18

Qualitative Descriptions of Temporal Relationships

We can describe the temporal occurrence of event/actions:

- absolute by using a date/time system
- relative with respect to other event occurrences
- quantitatively, using time measurements (5 secs)
- qualitatively, using comparisons (before/overlaps)


10/19

Allen's Interval Calculus

- Allen proposed a calculus about relative order of time intervals
 - Allows us to describe, e.g.,
 - Interval I occurs before interval J
 - Interval J occurs before interval K
 - and to conclude
 - Interval I occurs before interval K
- 13 jointly exhaustive and pair-wise disjoint relations between intervals

10/20

Allen's 13 Interval Relations

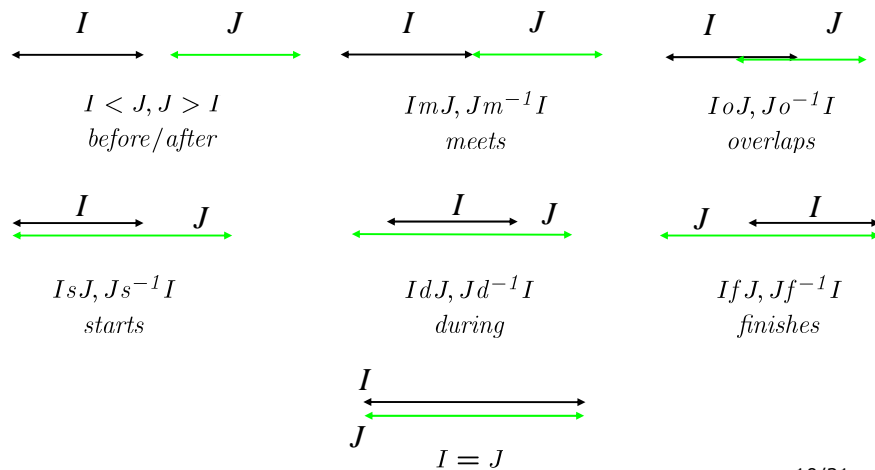

10/21

Examples

- Using Allen's relation system one can describe temporal configurations as follows:
 - $X < Y, Y o Z, Z > X$
- One can also use disjunctions (unions) of temporal relations:
 - $X(<, m)Y, Y(o, s)Z, Z > X$

10/22


Reasoning in Allen's Relations System

How do we reason in Allen's system

- Checking whether a set of formulae is **satisfiable**
 - Checking whether a temporal formula **follows logically**
- Use a **constraint propagation technique** for CSPs with infinite domains (3-consistency), based on *composing relations*

10/23

Constraint Propagation



$$\begin{array}{lcl}
 X < Y s Z & = & X \quad Z \\
 X < Y o Z & = & X \quad Z \\
 X m Y s Z & = & X \quad Z \\
 X m Y o Z & = & X \quad Z
 \end{array}$$

Do that for every triple until nothing changes anymore, then CSP is 3-consistent

10/24

Concluding Remarks: Use of Logical Formalisms

- In many (but not all) cases, full inference in PL1 is simply too slow (and therefore too unreliable).
 - Often, special (logic-based) representational formalisms are designed for specific applications, for which specific inference procedures can be used. Examples:
 - Description logics for representing conceptual knowledge.
 - James Allen's time interval calculus for representing qualitative temporal knowledge.
 - Planning: Instead of situation calculus, this is a specialized calculus (STRIPS) that allows us to address the frame problem.
- Generality vs. efficiency
- In every case, logical semantics is important!