Principles of AI Planning

14. Nondeterministic planning

Albert-Ludwigs-Universität Freiburg

UNI FREIBURG

Bernhard Nebel and Robert Mattmüller

January 11th, 2013

UNI FREIBURG

Motivation

Transition systems and planning tasks

Plans

Motivation

Nondeterministic planning

UNI FREIBURG

Motivation

Transition systems and planning tasks

Plans

- The world is not predictable.
- AI robotics:
  - imprecise movement of the robot
  - other robots
  - human beings, animals
  - machines (cars, trains, airplanes, lawn-mowers, ...)
  - natural phenomena (wind, water, snow, temperature, ...)
- Games: other players are outside our control.
  - To win a game (reaching a goal state) with certainty, all possible actions by the other players have to be anticipated (a winning strategy of a game).
  - The world is not predictable because it is unknown: we cannot observe everything.

In this lecture, we will only deal with uncertain operator outcomes, not with partial observability.

Nondeterminism in games

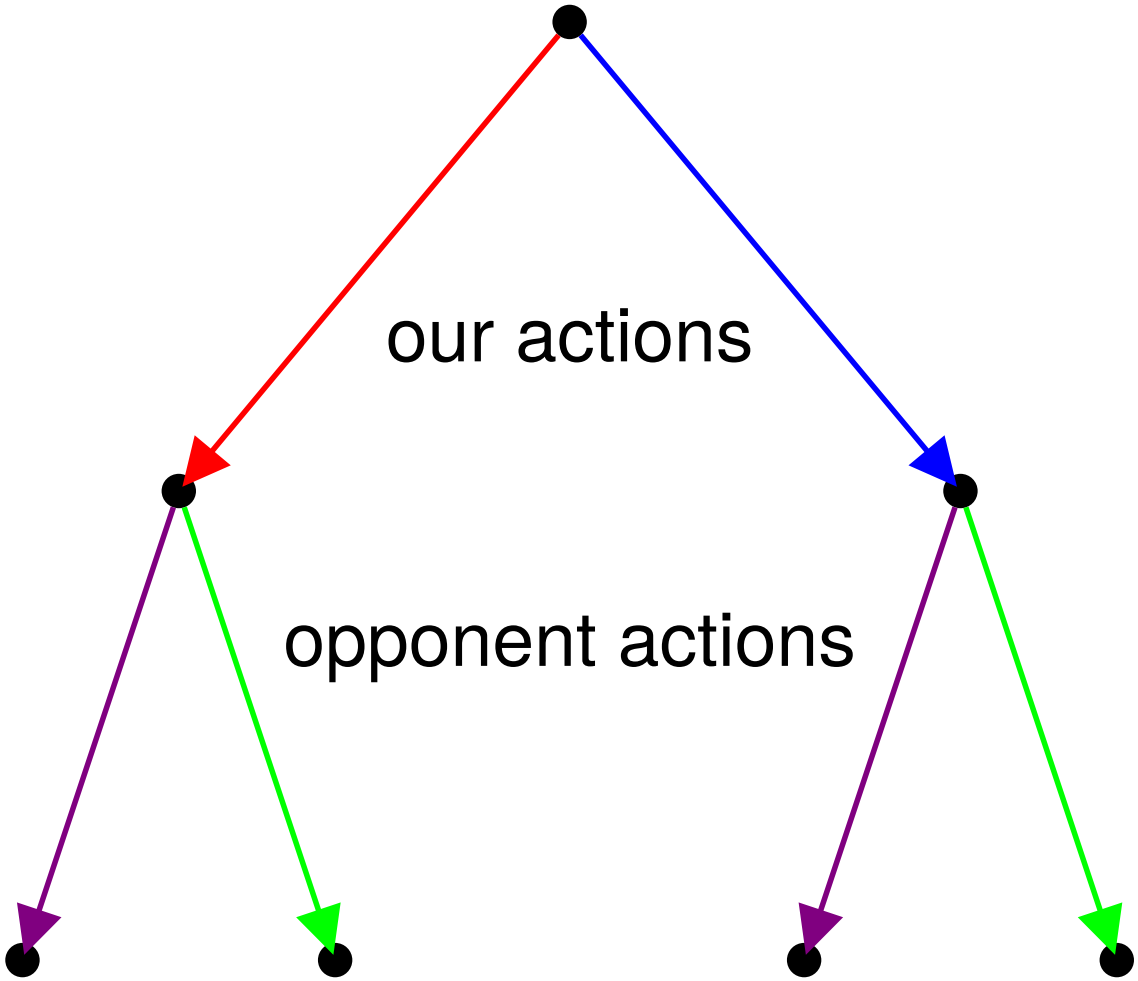

Nondeterminism in games

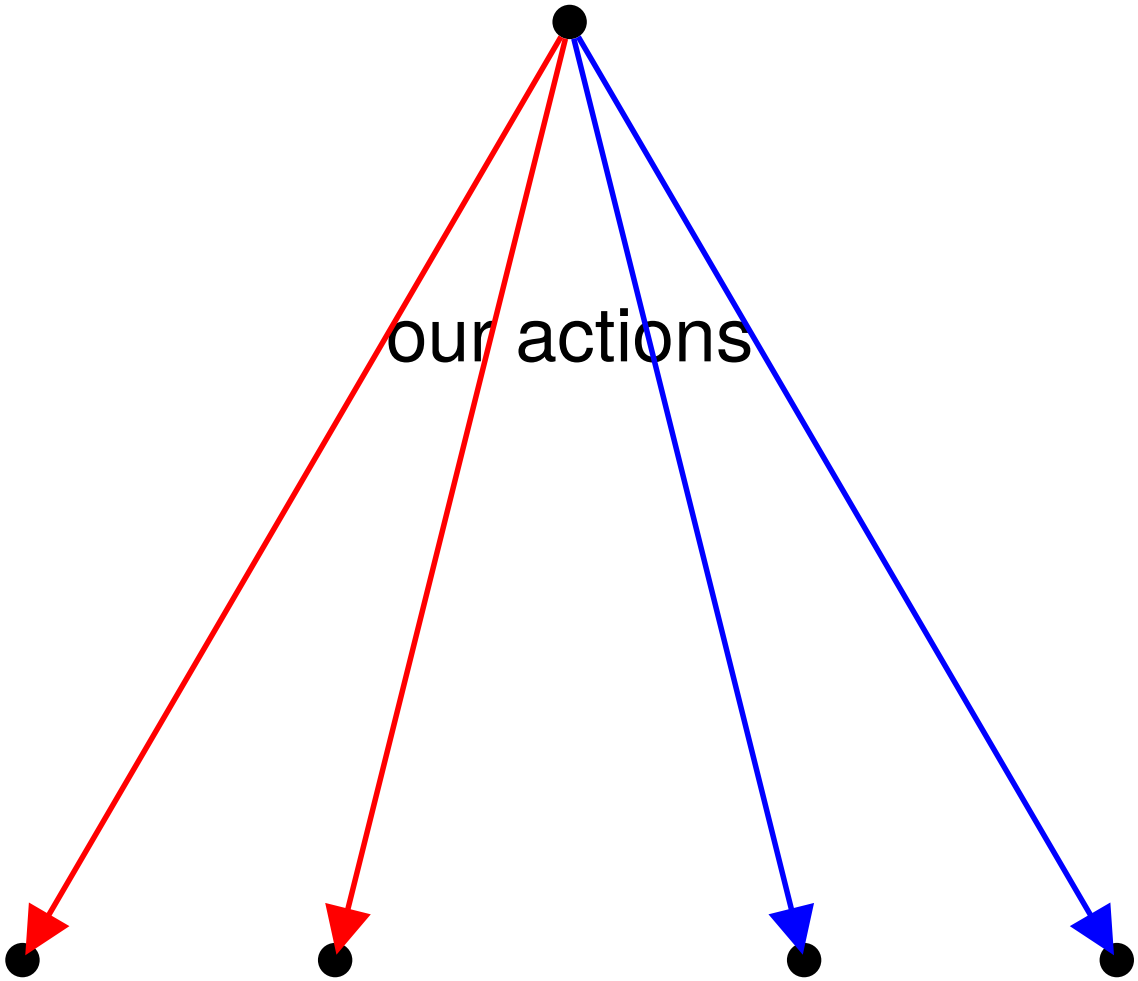

Nondeterministic planning

UNI FREIBURG

Motivation

Transition systems and planning tasks

Plans

- In deterministic planning we have assumed that the only changes taking place in the world are those caused by us and that we can exactly predict the results of our actions.
- Other agents and processes, beyond our control, are formalized as nondeterminism.
- Implications:
  1. The future state of the world cannot be predicted.
  2. We cannot reliably plan ahead: no single operator sequence achieves the goals.
  3. In some cases it is not possible to achieve the goals with certainty no matter which outcomes the actions have, but only under certain fairness assumptions.

UNI FREIBURG

Motivation

Transition systems and planning tasks

Transition systems

Operators

Planning tasks

Plans

Transition systems and planning tasks

Transition systems with nondeterminism (cf. Chapter 2)

UNI FREIBURG

Motivation
Transition systems and planning tasks
Transition systems
Operators
Planning tasks
Plans

Definition (transition system)

A nondeterministic transition system is a 5-tuple $\mathcal{T} = \langle S, L, T, s_0, S_\star \rangle$ where

- S is a finite set of states,
- L is a finite set of (transition) labels,
- $T \subseteq S \times L \times S$ is the transition relation,
- $s_0 \in S$ is the initial state, and
- $S_\star \subseteq S$ is the set of goal states.

Note: $T \subseteq S \times L \times S$ allows nondeterministic operators with more than one possible outcome.

Nondeterministic operators

UNI FREIBURG

Motivation

Transition systems and planning tasks

Transition systems

Operators

Planning tasks

Plans

Definition (nondeterministic operator)

Let V be a set of finite-domain state variables. A nondeterministic operator in unary nondeterminism normal form with conjunctive precondition and unconditional effects, or nondeterministic operator for short, is a pair $o = \langle \chi, E \rangle$, where

- χ is a conjunction of atoms over V (the precondition), and
- $E = \{e_1, \ldots, e_n\}$ is a finite set of possible effects of o, each e_i being a conjunction of atomic finite-domain effects over V.

Nondeterministic operators

UNI FREIBURG

Motivation

Transition systems and planning tasks

Transition systems

Operators

Planning tasks

Plans

Definition (nondeterministic operator application)

Let $o = \langle \chi, E \rangle$ be a nondeterministic operator and s a state.

Applicability of o in s is definied as in the deterministic case, i.e., o is applicable in s iff $s \models \chi$ and the change set of each effect $e \in E$ is consistent.

If o is applicable in s, then the application of o in s leads to one of the states in the set $app_o(s) := \{app_{\langle \chi, e \rangle}(s) \mid e \in E\}$ nondeterministically.

Nondeterministic operators

UNI FREIBURG

Motivation

Transition systems and planning tasks

Transition systems

Operators

Planning tasks

Plans

Example

$put\text{-}on\text{-}block(A,B) = \langle \chi, \{e_1, e_2\} \rangle$ where

- $\chi = \{handempty \mapsto false, clear\text{-}B \mapsto true, pos\text{-}A \mapsto hand\}$,
- $e_1 = \{handempty \mapsto true, clear\text{-}B \mapsto false, pos\text{-}A \mapsto on\text{-}B\}$,
- $e_2 = \{handempty \mapsto true, pos\text{-}A \mapsto table\}$.

Applied to a state where the agent is holding block A and block B is clear, this operator leads to one of two possible successor states. Either A gets stacked on B successfully, or A is dropped to the table.

Nondeterministic planning task

UNI FREIBURG

Motivation
Transition systems and planning tasks
Transition systems
Operators
Planning tasks
Plans

Definition (nondeterministic planning task)

A (fully observable) nondeterministic planning task is a 4-tuple $\Pi = \langle V, I, O, \gamma \rangle$ where

- V is a finite set of finite-domain state variables,
- I is an initial state over V,
- O is a finite set of nondeterministic operators over V, and
- γ is a conjunctions of atoms over V describing the goal states.

Remark: In the following, we will always assume that our nondeterministic planning tasks are fully observable and omit the qualification.

Mapping planning tasks to transition systems

UNI FREIBURG

Motivation

Transition systems and planning tasks

Transition systems

Operators

Planning tasks

Plans

Definition (induced transition system)

Every nondeterministic planning task $\Pi = \langle V, I, O, \gamma \rangle$ induces a corresponding nondeterministic transition system $\mathcal{T}(\Pi) = \langle S, L, T, s_0, S_\star \rangle$:

- S is the set of all states over V,
- L is the set of operators O,
- $T = \{\langle s, o, s' \rangle \mid s \in S,\ o \text{ applicable in } s,\ s' \in app_o(s)\}$,
- $s_0 = I$, and
- $S_\star = \{s \in S \mid s \models \gamma\}$

UNI FREIBURG

Motivation

Transition systems and planning tasks

Plans

Motivation

Definition

Plans

What is a plan?

UNI FREIBURG

Motivation

Transition systems and planning tasks

Plans

Motivation

Definition

In nondeterministic planning, plans are more complicated objects than in the deterministic case:

The best action to take may depend on nondeterministic effects of previous operators.

Nondeterministic plans thus often require branching.
Sometimes, they even require looping
(we will likely only cover branching in this course).

What is a plan?

UNI FREIBURG

Example (Branching)

(Part of) a plan for winning the game Connect Four can be described as follows:

- Place a tile in the 4th column.
  - If opponent places a tile in the 1st, 4th or 7th column, place a tile in the 4th column.
  - If opponent places a tile in the 2nd or 5th column, place a tile in the 2nd column.
  - If opponent places a tile in the 3rd or 6th column, place a tile in the 6th column.

There is no non-branching plan that solves the task (= is guaranteed to win the game).

Motivation

Transition systems and planning tasks

Plans

Motivation

Definition

What is a plan?

UNI FREIBURG

Motivation

Transition systems and planning tasks

Plans

Motivation

Definition

Example (Looping)

A plan for building a card house can be described as follows:

1. Build a wall with two cards.
   If the structure falls apart, redo from start.
2. Build a second wall with two cards.
   If the structure falls apart, redo from start.
3. Build a ceiling on top of the walls with a fifth card.
   If the structure falls apart, redo from start.
4. Build a wall on top of the ceiling with two cards.
   If the structure falls apart, redo from start.

There is no non-looping plan that solves the task
(unless the planning agent is very dextrous).

What is a plan?

UNI FREIBURG

Motivation
Transition systems and planning tasks
Plans
Motivation
Definition

- Plans should be allowed to branch. Otherwise, most interesting nondeterministic planning tasks cannot be solved.
- We may or may not allow plans to loop.
  - Non-looping plans are preferable because they guarantee that the goal is reached within a bounded number of steps.
  - Where non-looping plans are not possible, looping plans may be adequate because they at least guarantee that the goal will be reached eventually unless nature is unfair.

We will now introduce the formal concepts necessary to define branching (and looping) plans.

Nondeterministic plans: formal definition

UNI FREIBURG

Motivation

Transition systems and planning tasks

Plans

Motivation

Definition

Definition (strategy)

Let $\Pi = \langle V, I, O, \gamma \rangle$ be a nondeterministic planning task with state set S and goal states $S_\star$.

A strategy for Π is a function $\pi : S_\pi \to O$ for some subset $S_\pi \subseteq S$ such that $\pi(s)$ is applicable in s for all $s \in S_\pi$.

The set of states reachable in $\mathscr{T}(\Pi)$ starting in state s and following π is denoted by $S_\pi(s)$.

Nondeterministic plans: formal definition

UNI FREIBURG

Motivation

Transition systems and planning tasks

Plans

Motivation

Definition

Definition (weak, closed, proper, and acyclic strategies)

Let $\Pi = \langle V, I, O, \gamma \rangle$ be a nondeterministic planning task with state set S and goal states $S_\star$, and let π be a strategy for Π. Then π is called

- weak iff $S_\pi(s_0) \cap S_\star \neq \emptyset$,
- closed iff $S_\pi(s_0) \subseteq S_\pi \cup S_\star$,
- proper iff $S_\pi(s') \cap S_\star \neq \emptyset$ for all $s' \in S_\pi(s_0)$, and
- acyclic iff there is no state $s' \in S_\pi(s_0)$ such that s' is reachable from s' following π in a strictly positive number of steps.

Nondeterministic plans: formal definition

UNI FREIBURG

Motivation

Transition systems and planning tasks

Plans

Motivation

Definition

- Strategies in nondeterministic planning correspond to applicable operator sequences in deterministic planning.
- In deterministic planning, a plan is an applicable operator sequence that results in a goal state.
- In nondeterministic planning, we define different notions of “resulting in a goal state”.

Nondeterministic plans: formal definition

UNI FREIBURG

Motivation
Transition systems and planning tasks
Plans
Motivation
Definition

Definition

Let $\Pi = \langle V, I, O, \gamma \rangle$ be a nondeterministic planning task with state set S and goal states $S_\star$.

- A strategy for Π is called a weak plan for Π iff it is weak.
- A strategy for Π is called a strong cyclic plan for Π iff it is closed and proper.
- A strong cyclic plan for Π is called a strong plan for Π iff it is acyclic.

Summary and outlook

UNI FREIBURG

Motivation

Transition systems and planning tasks

Plans

Motivation

Definition

We extended the deterministic (classical) planning formalism:

- operators can be nondeterministic

Remark: We could also introduce nondeterminism in the initial situation by allowing more than one initial state, but this can be easily compiled into our formalism. (How?)

As a consequence, plans can contain

- branches and
- loops.

In the following chapter, we consider the strong planning problem and the strong cyclic planning problem and discuss some algorithms.